

Freego F3 0000000000

I.000 Freego F3 0000000000

0000

Assembly



Insert handlebar into the pedal base, then fasten the hexagon screws.



Adjust the height of the handlebar then fasten the adjusting screw.



Remove the handle clamp cover, put two handles onto the connecting rod.



Put the clamp cover back, and fasten it with screws.



Keep the scooter remain level, then switch the power on.



Hold the handle, and then step on the pedal one foot by one foot

C E FC K



Freego®



www.FreeGoChina.com

C E FC K



Freego®



www.FreeGoChina.com

C E FC K



Freego®



www.FreeGoChina.com

C E FC K



Freego®



www.FreeGoChina.com



Freego F3 產品特點

1. 採用鋰電池
2. 72V 電壓
3. 雙馬達
4. 雙輪
5. LED 顯示
6. 安全剎車

Freego F3 產品規格

1. 重量 50 kg
2. 高度 130 cm
3. 寬度 20 cm
4. Wheel: 19 吋
5. 速度 30-35 km/h 最高 65 km/h 15 KmVh 限制
6. 傾斜 30 °
7. Motor: 1000w*2(2*1000wVpc) 雙馬達
8. 尺寸 340 * 430 * 125 mm
9. Battery 36V 42Ah 72V 雙電池
11. HS 8711901090
12. Dimension: 52 * 83 * 122 cm
13. Max 速度 30-35 km/h
14. 傾斜 30 °
15. 剎車 0

- 16. 5-8
- 17. Power
- 18. Voltage: 100 v-240 v
- 19. 48
- 20. 340 * 430 * 125
- 21. 250

Freego F3

F3 x 1pc
 110-240V x 1pc
 s
 x 2pcs



V. Shipping:

EXW

- 1.3 DHL VTNT 3-5
- 2. 5 5-7
- 3. 10 20-30

1.1

- 1.
- 2. 100%
- 3.
- 4.
- 5.


OEM

1.2

- 1. 12 6
- 2.
- 3.
- 4.
- 5.

1.3

50 continents 5 20

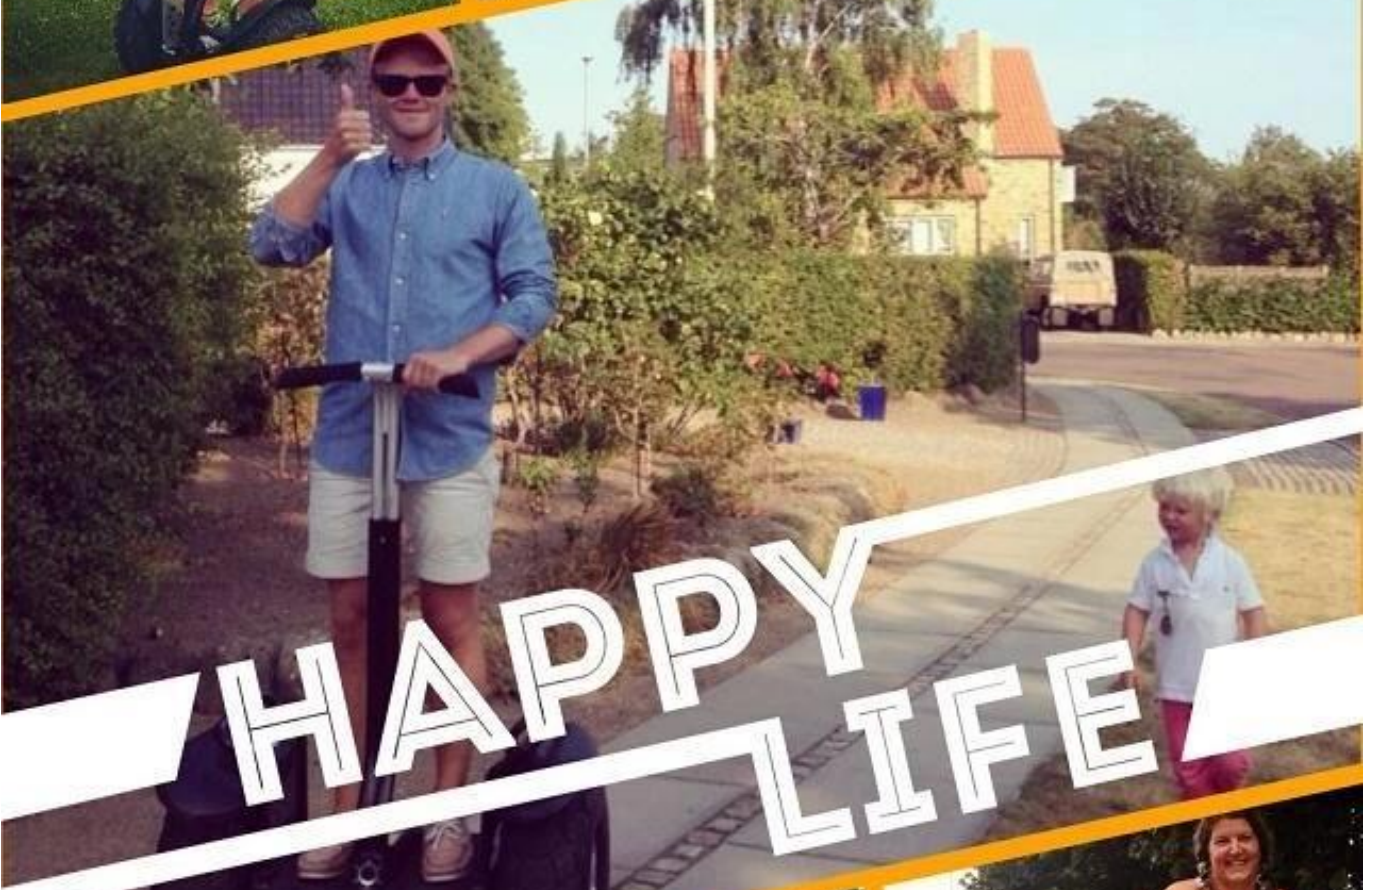

□□□□□□□□□□